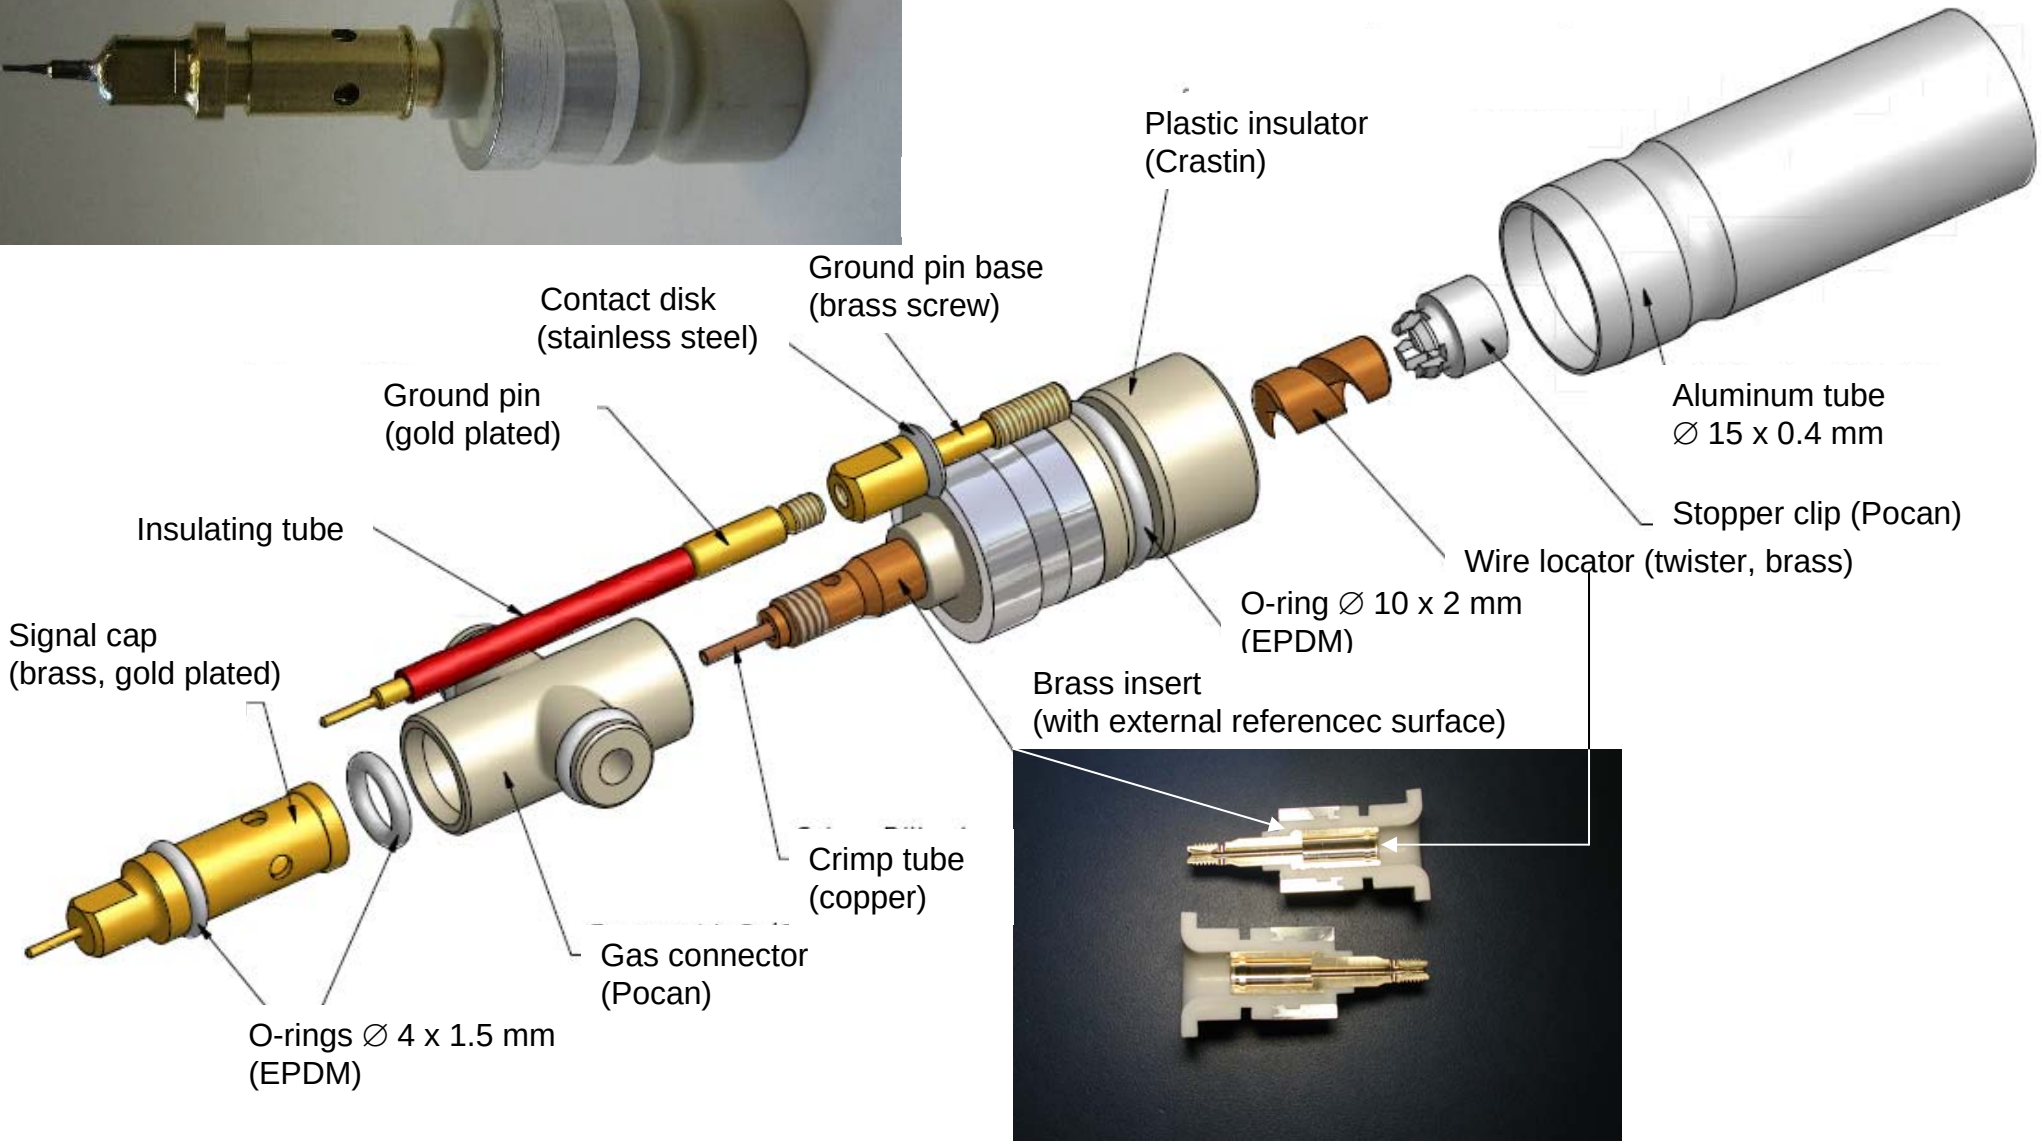
Plastic insulator
(Crastin)
Ground pin base
(brass screw)
Contact disk
(stainless steel)
Ground pin
(gold plated)
Insulating tube
Signal cap
(brass, gold plated)
Aluminum tube
∅ 15 x 0.4 mm
Stopper clip (Pocan)
Wire locator (twister, brass)
O-ring ∅ 10 x 2 mm
(EPDM)
Brass insert
(with external referencec surface)
Crimp tube
(copper)
Gas connector
(Pocan)
O-rings ∅ 4 x 1.5 mm
(EPDM)