



Construction and Test of a Full Prototype Drift-Tube Chamber for the Upgrade of the ATLAS Muon Spectrometer at High LHC Luminosities

B. Bittner¹ J. Dubbert¹ O. Kortner¹ H. Kroha¹ A. Manfredini¹ S. Ott¹ R. Richter¹ P. Schwegler¹
D. Zanzi¹ O. Biebel² A. Engl² R. Hertenberger² A. Zibell²


¹Max-Planck-Institut für Physik, Munich ²Ludwig-Maximilians University, Munich



Abstract

For the planned high-luminosity upgrades of the Large Hadron Collider (LHC) background rates of neutrons and gamma rays of up to 14 kHz/cm² are expected which exceed the rate capability of the current ATLAS precision muon tracking detectors, the Monitored Drift Tube (MDT) chambers, with a drift tube diameter of 30 mm. So called sMDT chambers with a drift tube diameter of 15 mm have been developed for upgrades of the ATLAS muon spectrometer. A full sMDT prototype chamber has been constructed and tested in a muon beam at CERN and with cosmic muons at high gamma irradiation rates of up to 23 kHz/cm². The chamber design and construction procedures will be discussed. The test results demonstrate the required track reconstruction efficiency and spatial resolution of the sMDT chambers at background rates well beyond the maximum expected value. The sense wire locations in the prototype chamber have been measured with few μm precision with cosmic rays using precise reference chambers and confirm a wire positioning accuracy of better than the 20 μm required.

Drift Tube Design

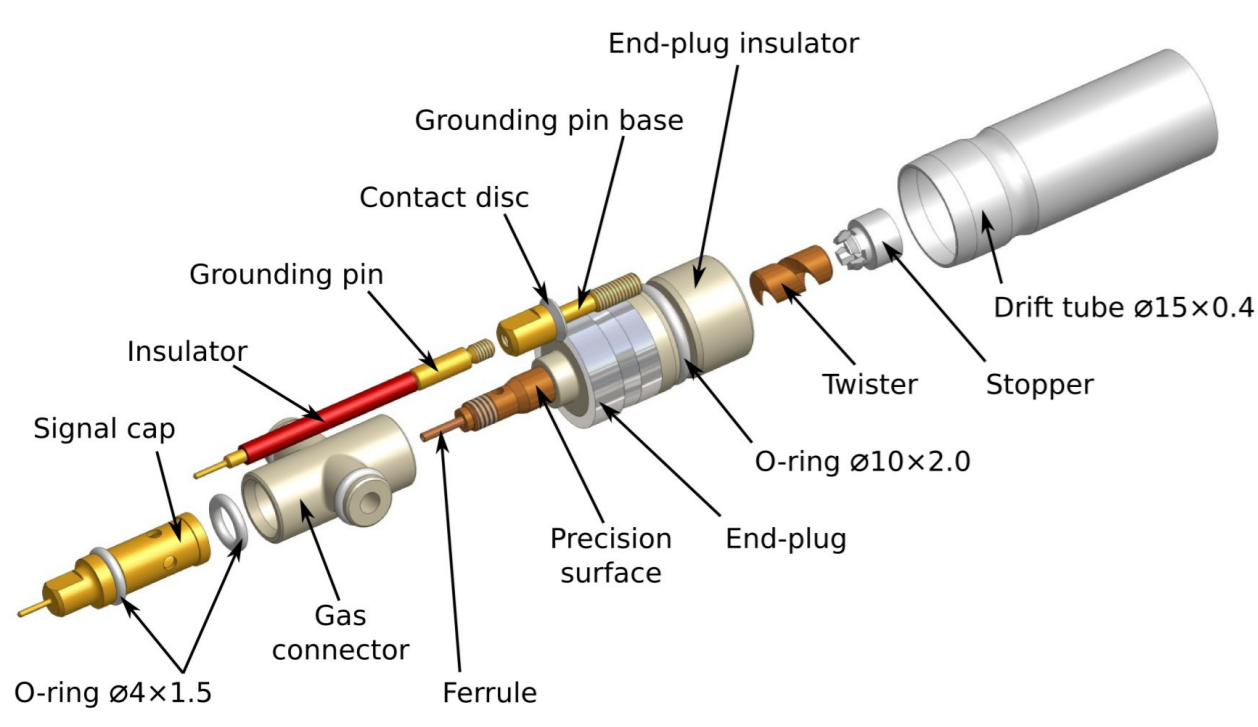

Outer tube diameter	15 mm ± 0.1 mm
Tube wall	0.4 mm Al
Anode wire	50 μm W-Re
Gas	Ar/CO ₂ = 93/7
Pressure	3 bara
Operating voltage	2730 V
Gas gain	20000
Max. drift time	185 ns

Advantages of Smaller Drift Tubes



- ▶ **7.8× lower detector occupancy**
 - ▶ Shorter max. drift time (700→185 ns)
 - ▶ Tube diameter (14.6→7.1 mm)
- ▶ **Less space charge**
 - ▶ ~ R³ for γ's
 - ▶ ~ R⁴ for charged hadrons
- ⇒ Improvement by factor 8 and 16, resp.
- ▶ **Twice the number of layers in the same volume**
 - ▶ More robust pattern recognition
 - ▶ Better tracking efficiency
- ▶ **Easy to integrate into the existing infrastructure**

Drift Tube Production and Quality Assurance

- ▶ 1204 tubes produced, 3 different lengths
- ▶ Entirely manual production, manpower 4 persons
- ▶ Production rate: up to 160 tubes / day

Full quality assurance of all tubes


- ▶ Wire tension measurement, limit (350 ± 15) g
- ▶ Gas leak test, limit 1 × 10⁻⁵ mbar L/s
- ▶ HV dark current measurement at 3010 V, limit 5 nA

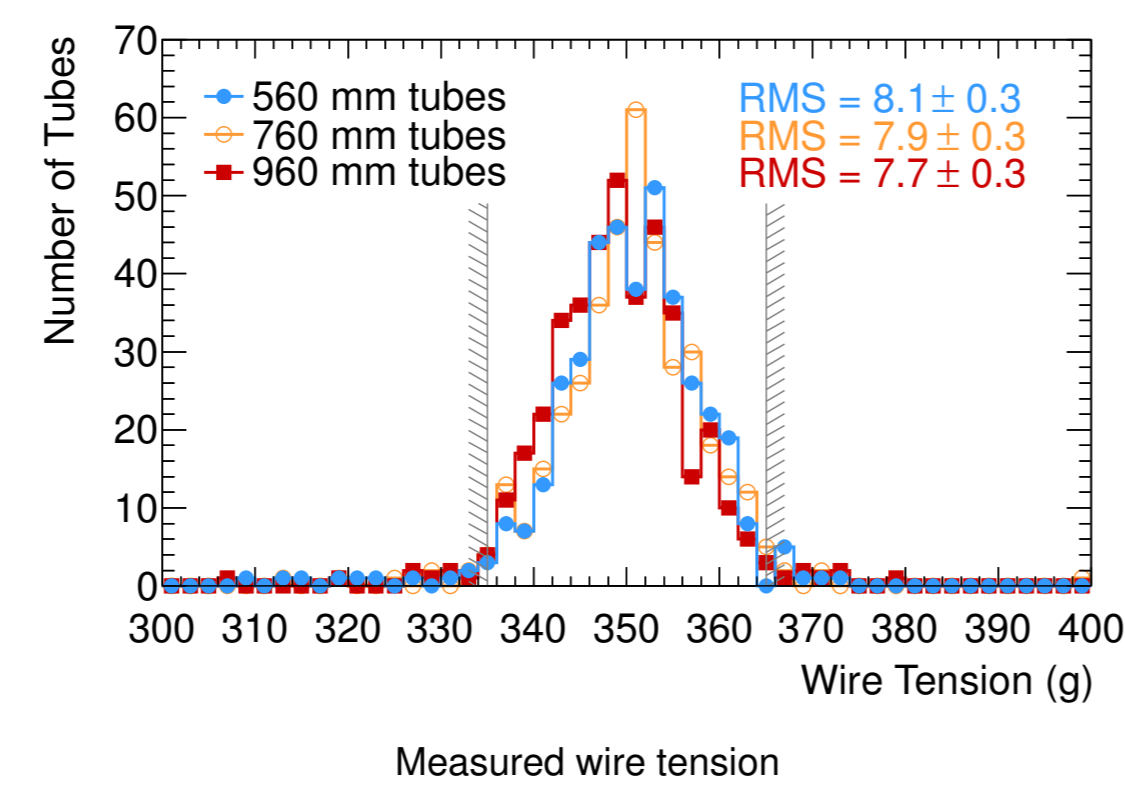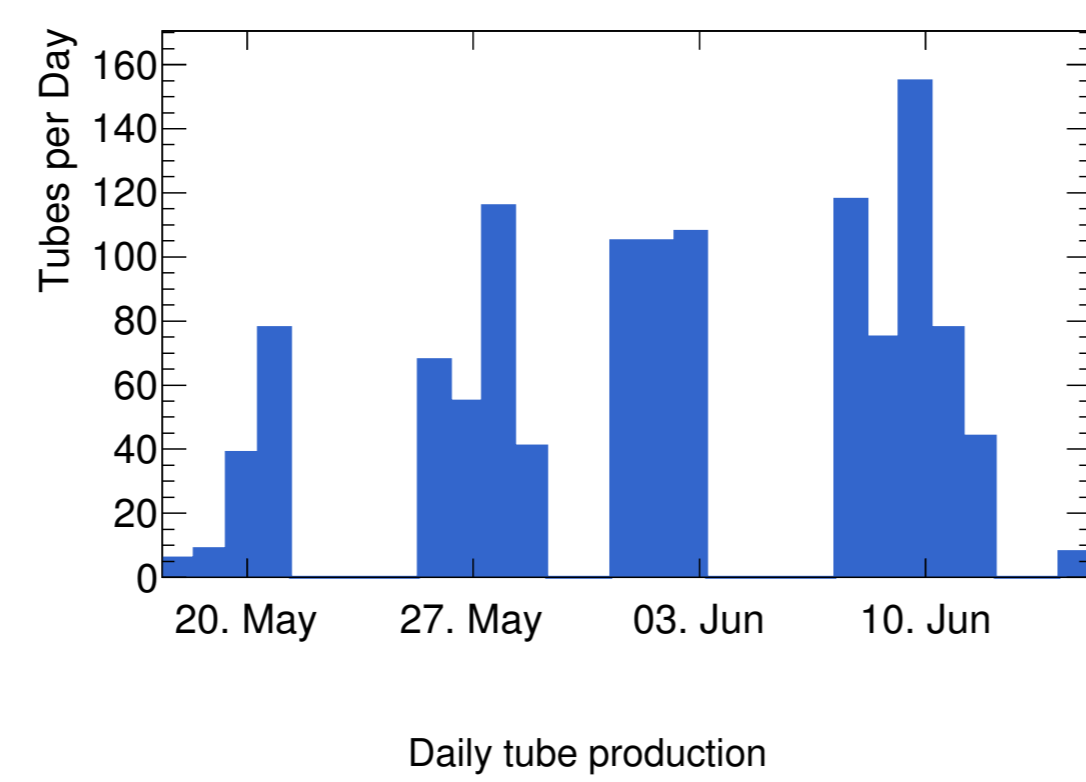


Test	Tested Tubes	Passed	Failure Rate (%)
Wire Tension	1204	1129	6.3 ¹
Leak Test	1171	1164	0.6
HV	1164	1159	0.4
Total	1204	1116	7.7

1) High failure rate at beginning of production only, reduced to 1%


Chamber Assembly Procedure

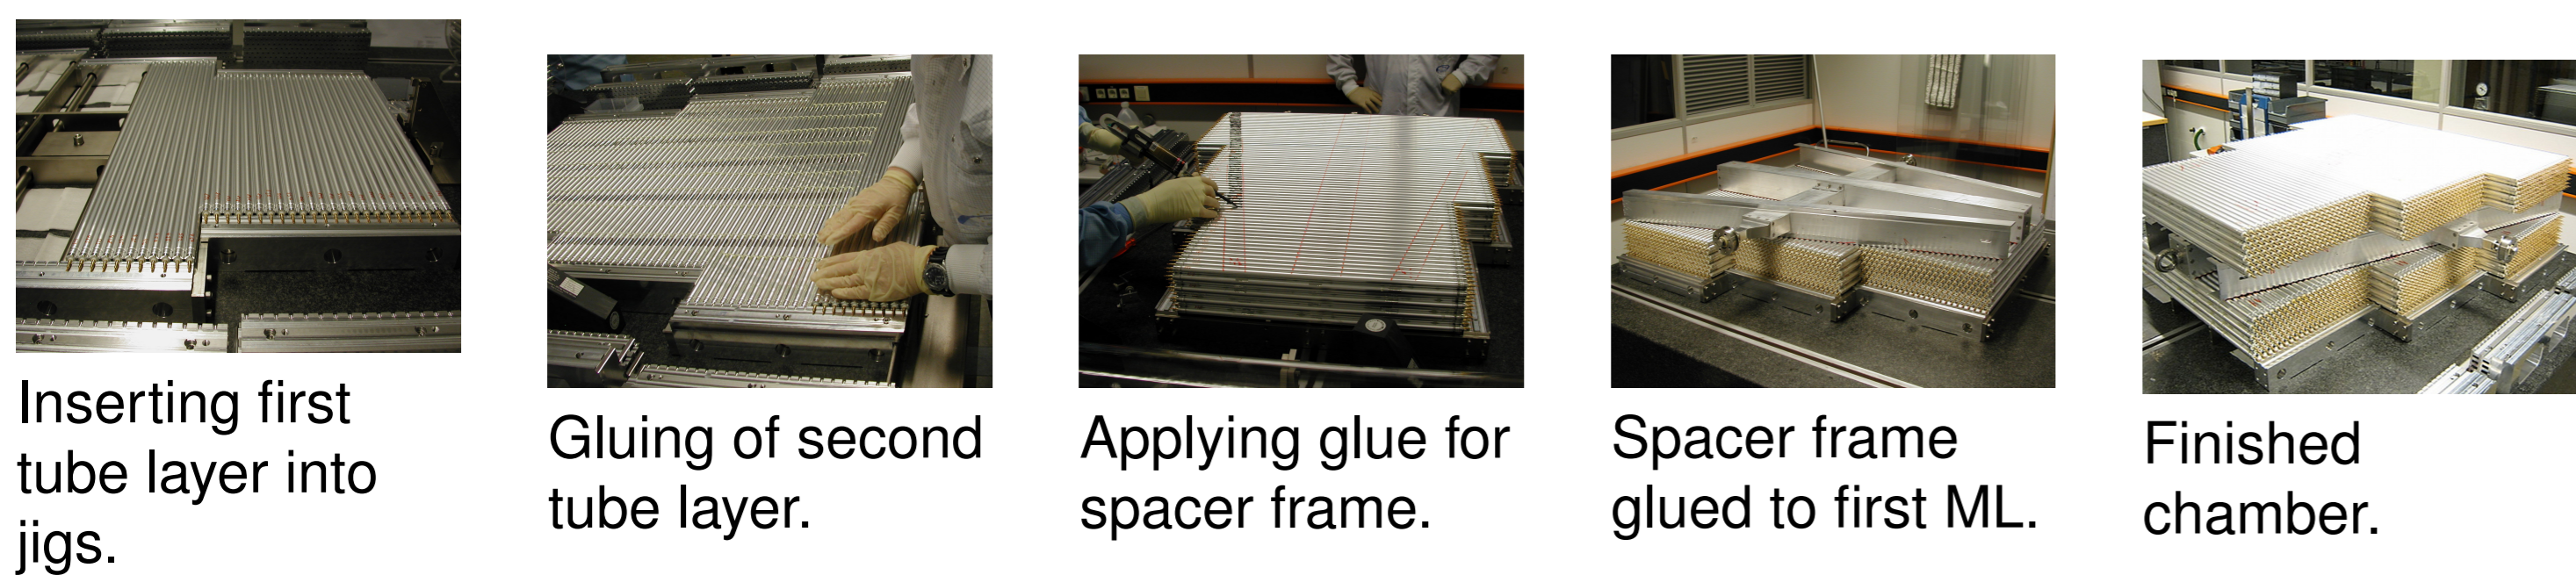

Precision Assembly Jigs

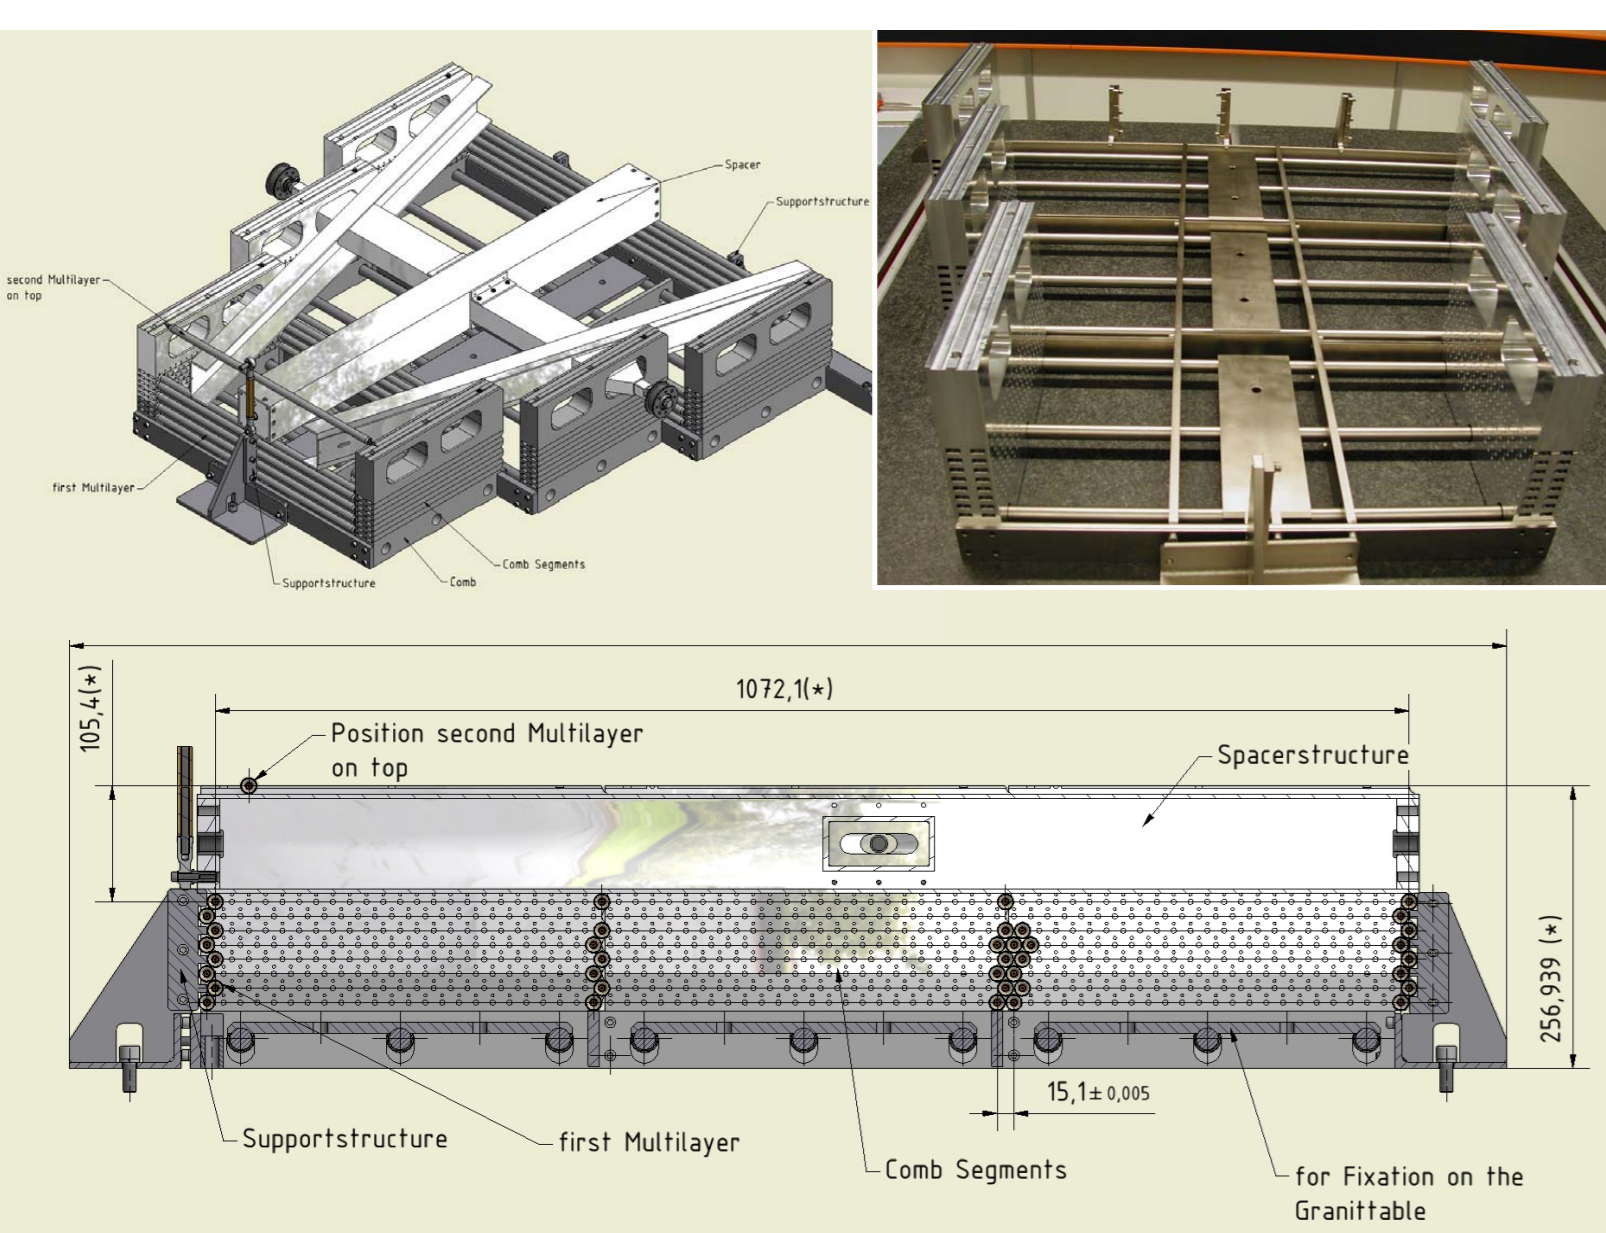


Finished Chamber

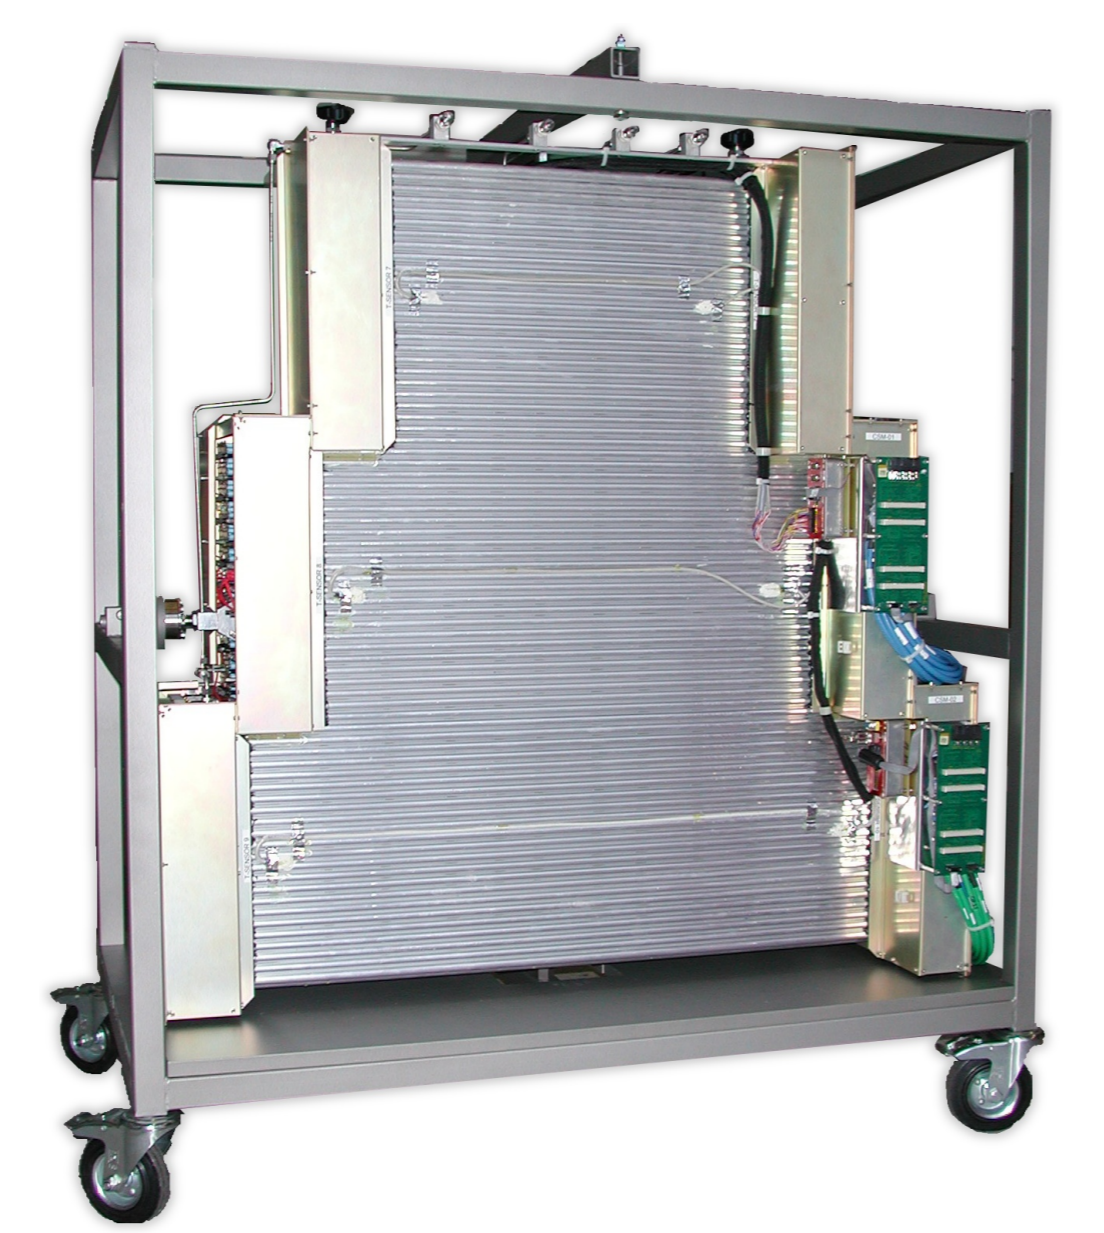


Front-End Electronics

- ▶ New passive front-end cards
 - High connector density necessitates 3-dimensional design
- ▶ Compatible with ATLAS active front-end cards and readout scheme
- ▶ New Amplifier-Shaper-Discriminator chip under development

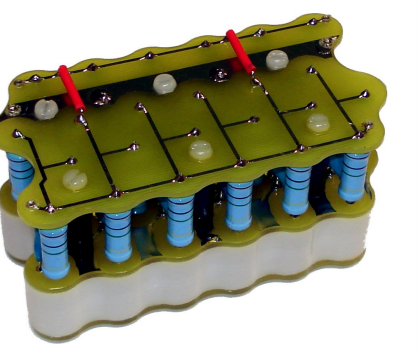


Wire Position Measurement

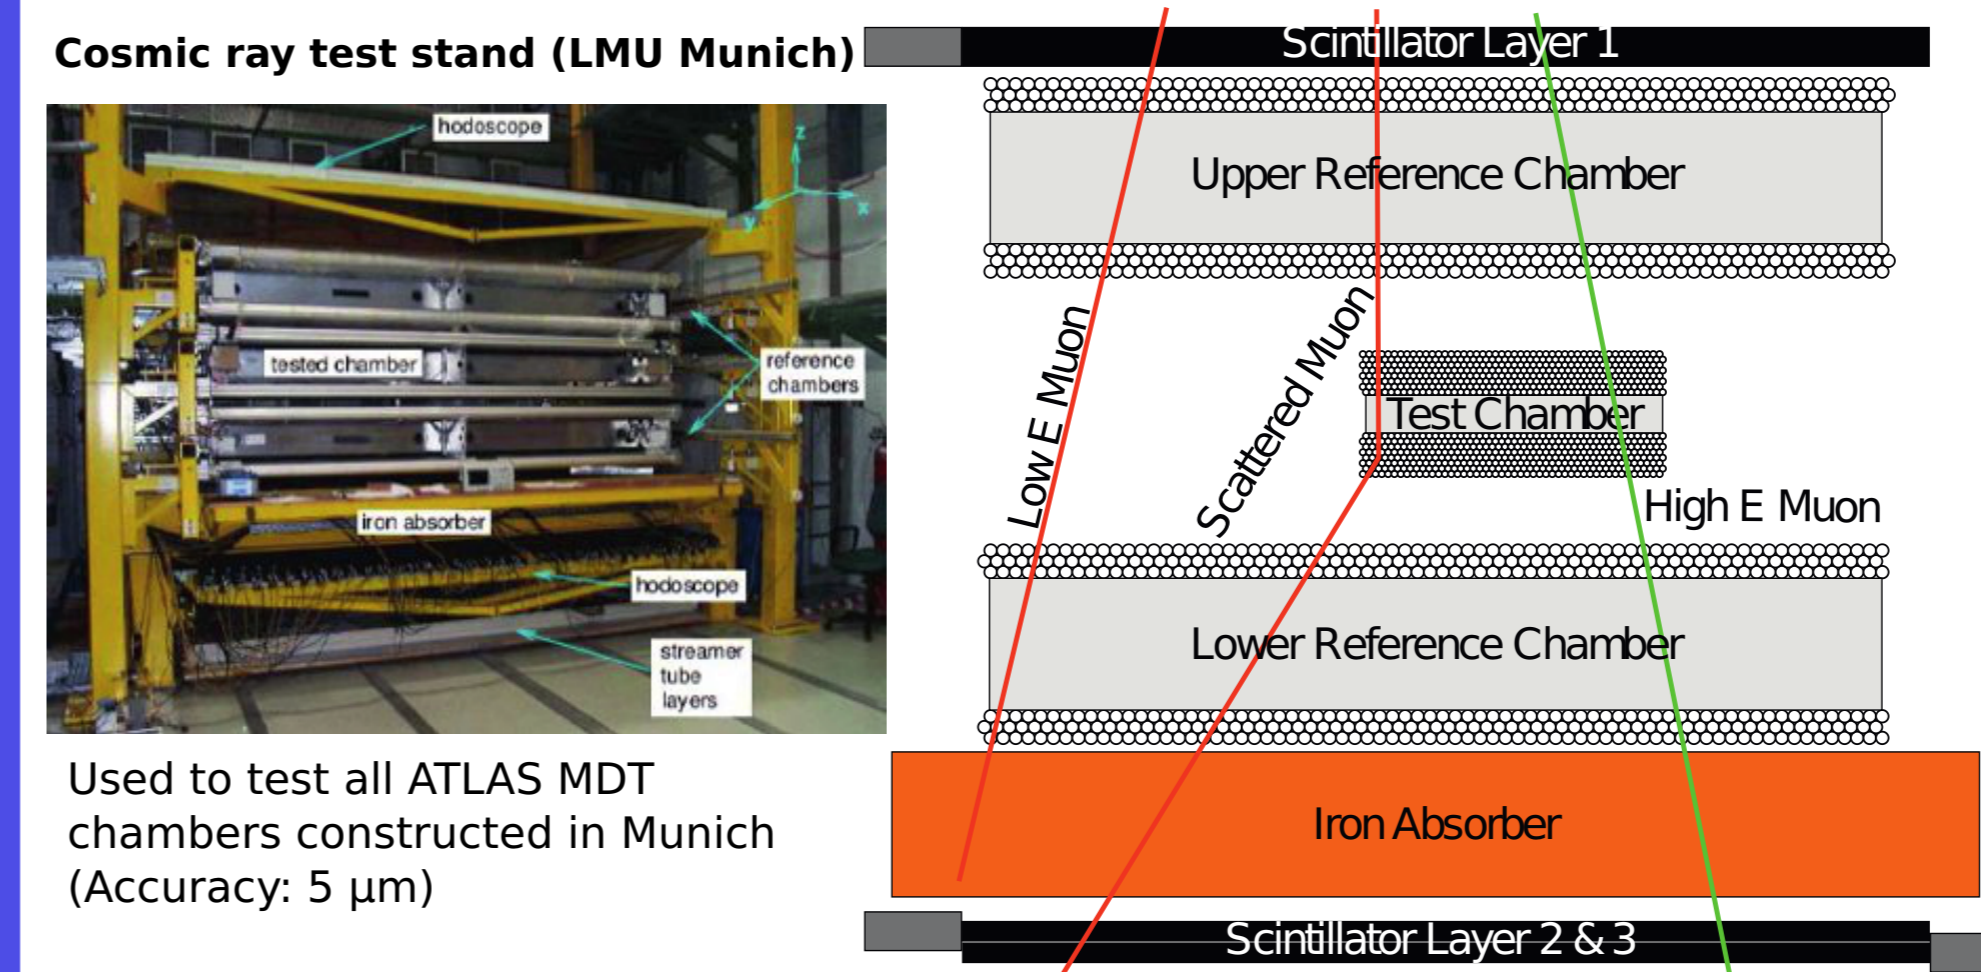

Used to test all ATLAS MDT chambers constructed in Munich (Accuracy: 5 μm)

- ▶ 1 million good muon tracks, stable running (temperature & alignment)
- ▶ reconstruction of muon tracks in the reference chambers
- ▶ extrapolation to the test chamber
- ▶ compare the reconstructed tracks with the hits in the test chamber

- ▶ Deviations of the wires from the (optimized) target positions are with 19 μm for δ_y and 16 μm for δ_z well within the requirements of 20 μm.
- ▶ Good agreement with the design values

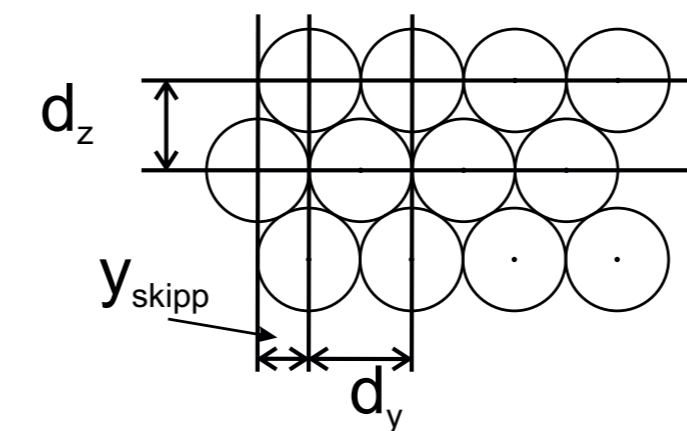

Measurements at High Background Rates



Measurement principle: Central tube layers of the chamber irradiated, outer (shielded) layers used for tracking of cosmic muons.

GIF 2011

- ▶ 150 GBq ¹³⁷Cs source
- ▶ flux up to 10 kHz/cm²

Tandem accelerator 2011


- ▶ 20 MeV protons
- ▶ flux up to >100 kHz/cm²

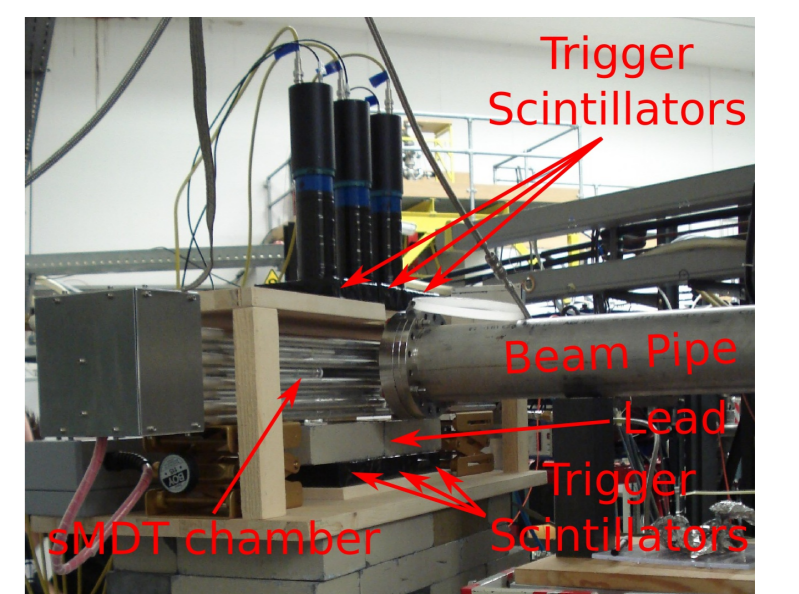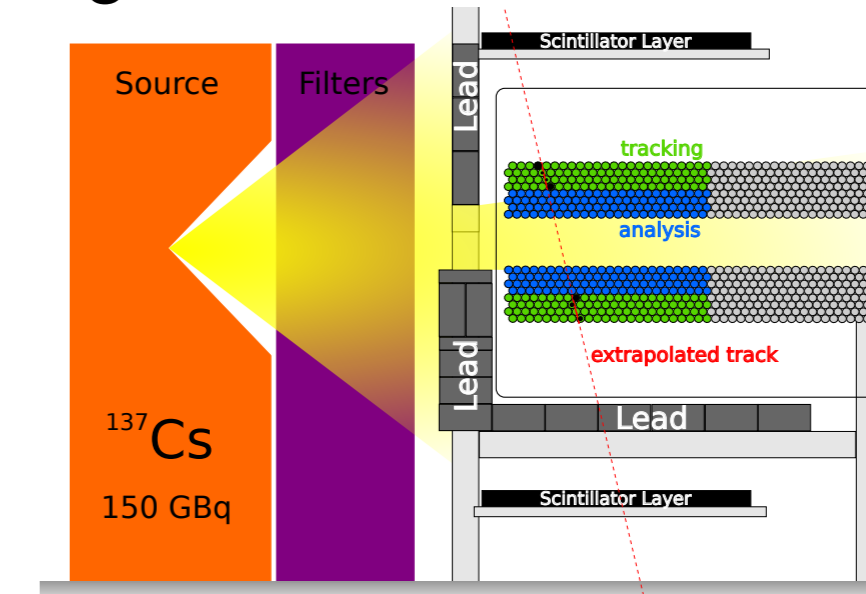

Analysis strategy:

- ▶ Upper and lower tubes shielded from γ source/beam.
 - ▶ Irradiated tubes in the central part subject to different rates.
1. Use track reconstructed in shielded part of the chamber to determine off-track residuals in irradiated tubes.
 2. Correct for track uncertainty and multiple scattering due to low energy muons ⇒ resolution σ.
 3. Determine 3σ efficiency.

Results

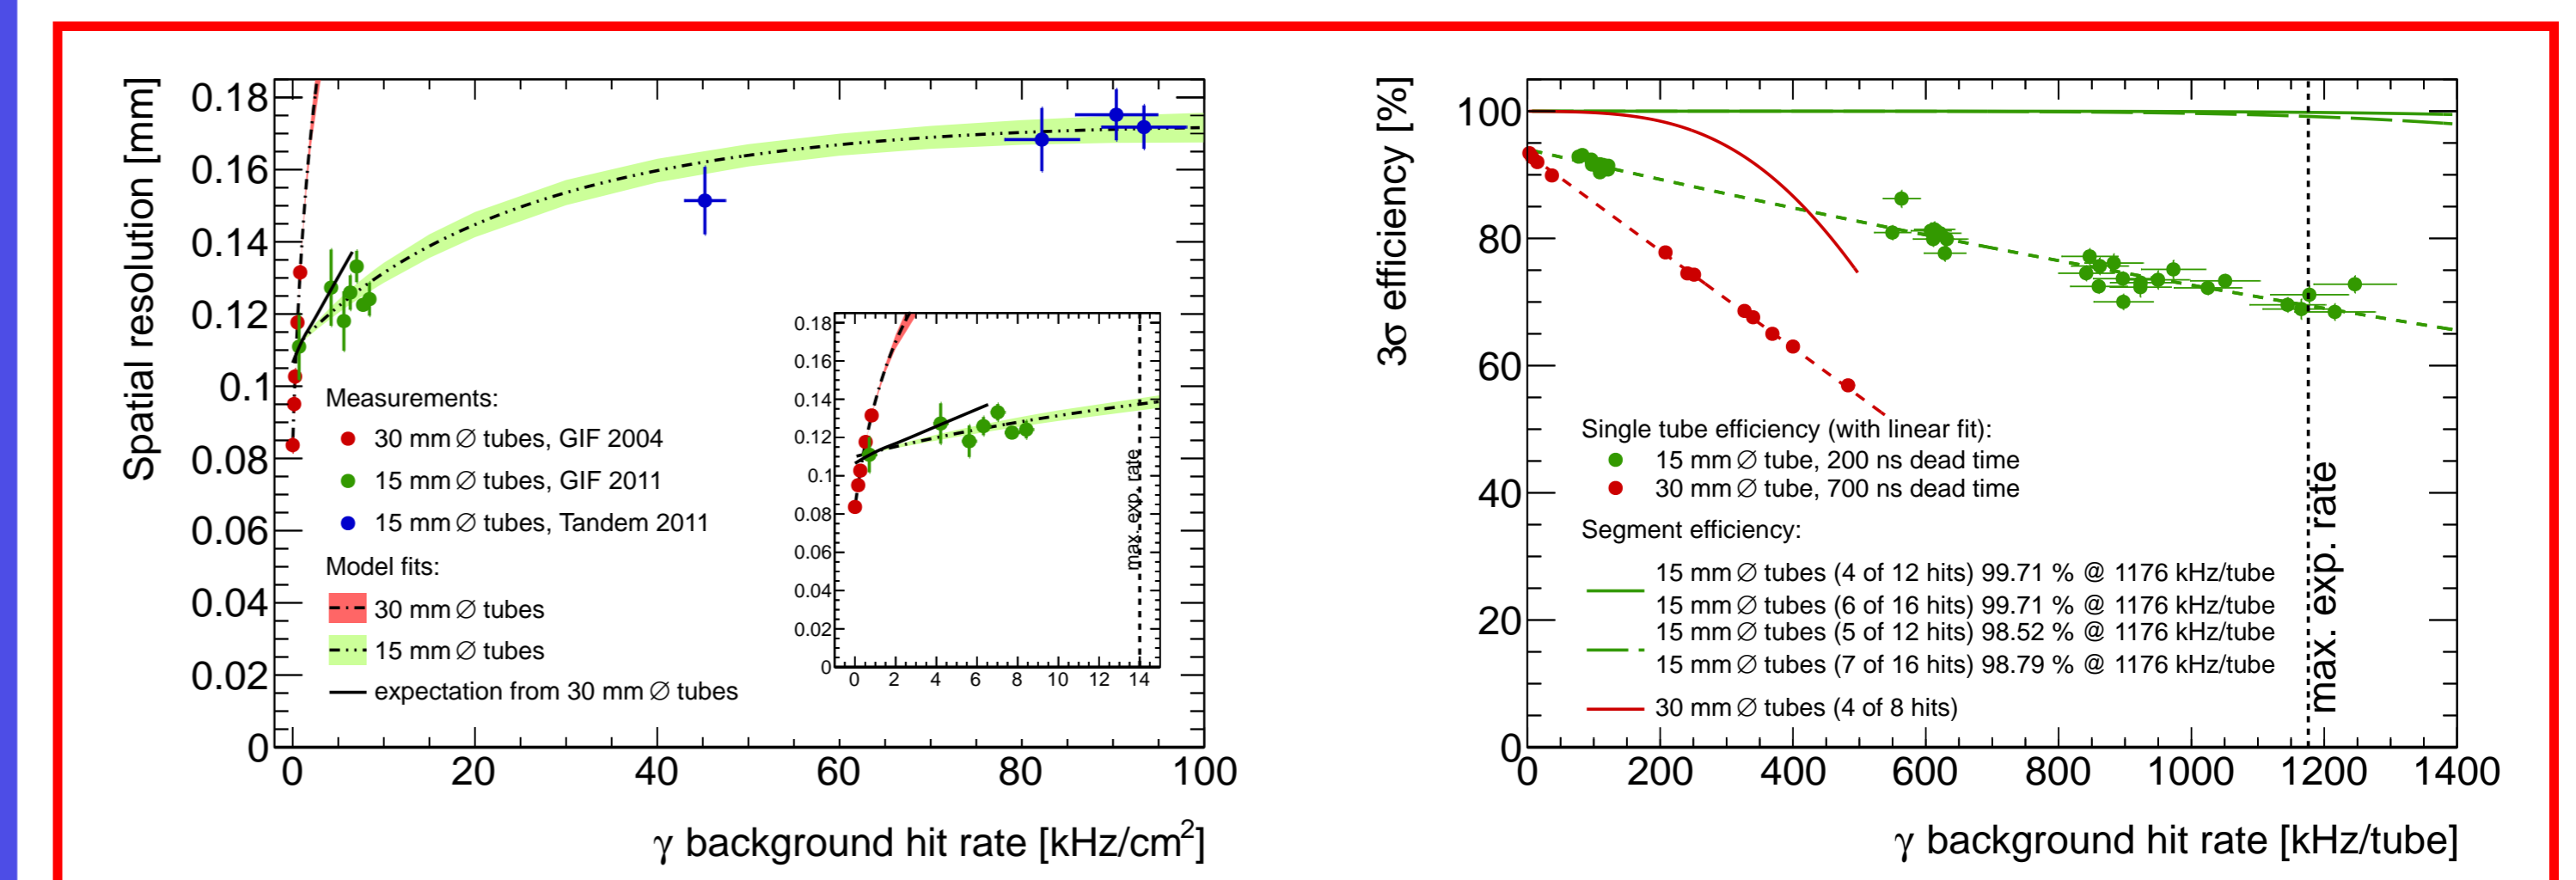


Iterative calculation of the gas gain with Diethorn's formula:

$$G = \left[\frac{E_{\text{wire}}}{3E_{\text{min}}} \right]^{\frac{r_{\text{wire}} E_{\text{wire}} \ln 2}{\Delta V}}$$

where E_{wire} is the electric field at the sense wire which depends on the space charge density and thus the background flux.

G₀ = nominal gain = 20 000.

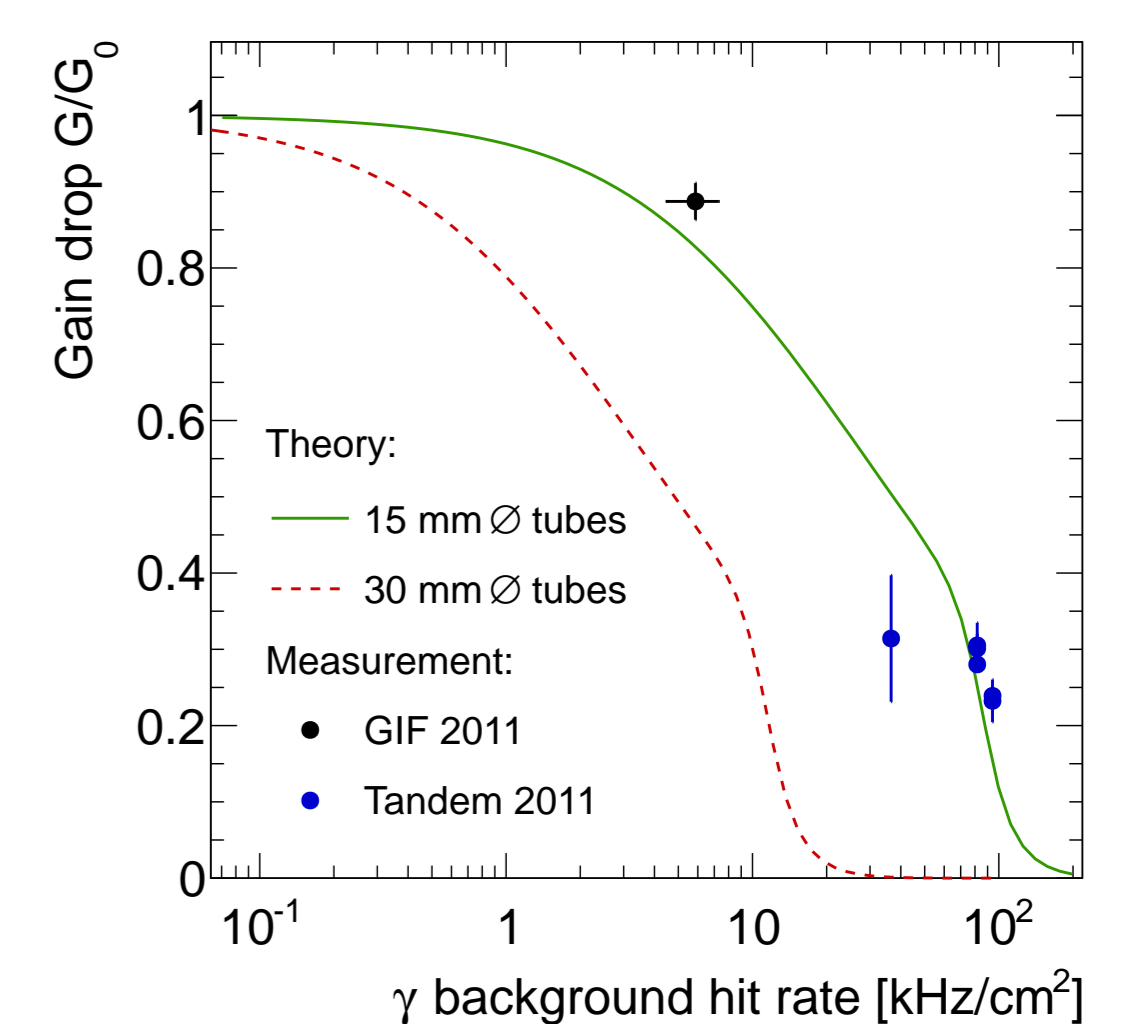

Conclusions

- ▶ Successful construction of 1200 drift tubes with low failure rate.
 - ▶ Chamber assembly procedures and time frame (1 chamber per week) validated.
 - ▶ Wire positioning accuracy (20 μm) validated with cosmic muons.
 - ▶ Measured up to the highest expected rates of 14 kHz/cm², 1175 kHz/tube:
 - ▶ Tracking efficiency >70% per tube and >99% with 8-layered chamber.
 - ▶ Spatial resolution <140 μm per tube and <50 μm with 8-layered chamber.
- ⇒ **Fulfill all requirements for operation at High Luminosity-LHC.**